

# Automatic Door Operator

## Ditec BIS O



**Capacity :**

120Kg with 1 wing, 200Kg with 2 wings.

**Capacity with reinforced wheels :**

150Kg with 1 wing, 250Kg with 2 wings.

**Level of Use :**

Very Heavy Duty.

**Power Input :**

230v~ / 50-60Hz.

**Max Opening / Closing Speed :**

0.8m/s with 1 wing, 1.6m/s with 2 wings.

**Product Dimensions :**

H = 140mm, W = 175mm

**Standard Transom Length :**

3300mm

4400mm

6600mm

**Electric Lock Power Supply :**

24 V @ 1.2 A


**Accessories Included as Standard :**

Antipanic Battery, Photocells, COM E Digital Programmer, Door Carrier Brackets, Top Rail Adaptor




**Included Accessories :**


**AB + ABSOV - Antipanic Battery**

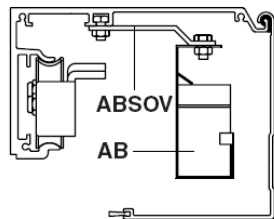

**BISAL + V1592 - Standard Door Bracket**

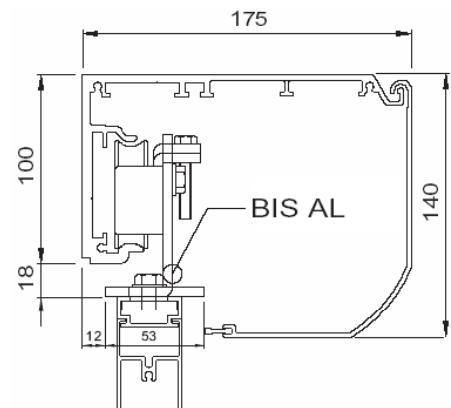

**0CELIS - Set of photocells**

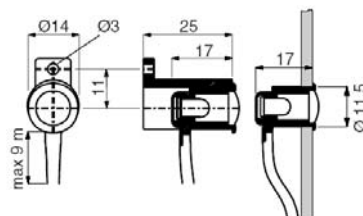

**COM2 - Digital program selector**



**Floor guides**

