

Key-switch: 3 Position (Fully Engraved)

Wiring Detail


Connection Details:

Off – Left

Com	N/C	N/O
White	Yellow	Red
Purple	Black	Blue


Off – Right

Com	N/C	N/O
Black	Purple	Brown
Yellow	White	Green

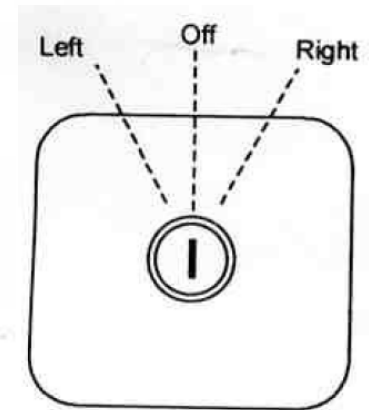

3 Position Key Switch with 3 Functions Engraved with hold open, off and auto. This Key-switch is mainly used with Automatic Swing Doors, But Can Also Be Used On Sliding Automatic Doors. Back Box Included.

Wiring 3 Position Key-switch into BAT-AS1 Operator

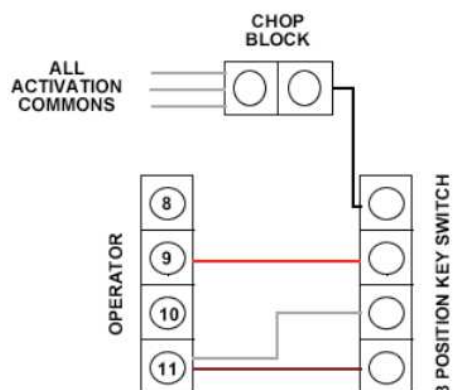

REMOVE ALL ACTIVATION COMMONS FROM 11 AND CONNECT TO KEYSWITCH BLACK
 KEYSWITCH WHITE & BROWN NOW CONNECT TO 11